



BLACKCAM™

blackcamsystem.com

**Blackcam™ System B20 –
Technical Specifications**

(Version 08.07.2016)


Dolly

Dimensions: 39cm x 19cm x 19cm (*15.35in x 7.48in x 7.48in*)

Speed: max. 3 m/s (*11.48ft/s*)

Power supply: V-Mount battery, runtime approx. 2hrs
Alternatively via power cable

Optical height: 14cm (*5.51in*) above upper edge of track, 26cm (*10.24in*) from track bottom

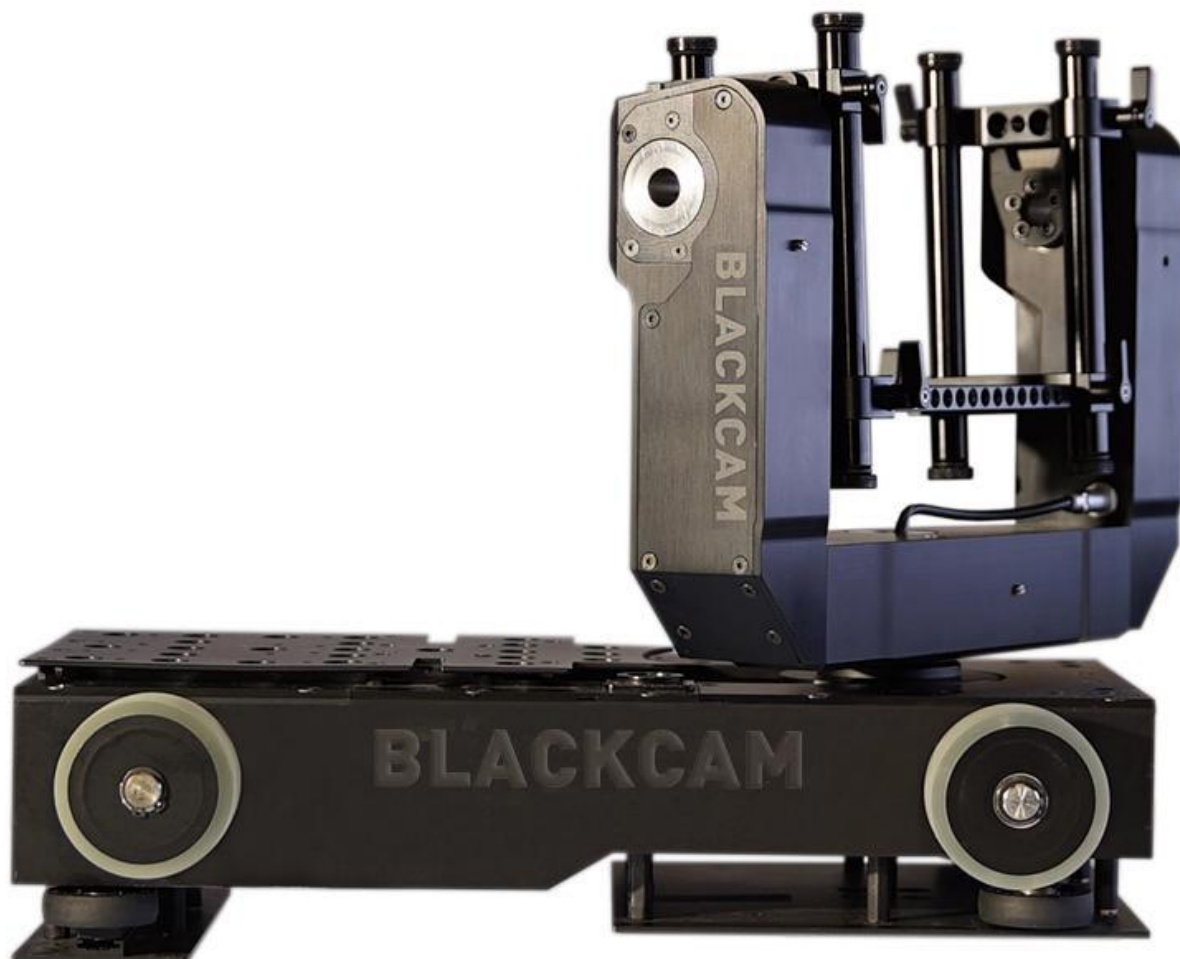

Track

Dimensions: 30cm width x 12cm height (11.81in width x 4.72in height), black anodized





Weight: 4kg/m (8.82lbs/3.28ft)

Pieces: Standard length: 4m (13.12ft), 2m (6.56ft), 1m (3.28ft), 50cm (1.64ft)
Custom lengths possible

Curves: Minimum inner radius: 1m (3.28ft)
Several radiuses on stock, customized radius possible




Remote Head

Blackcam™ MiniHead

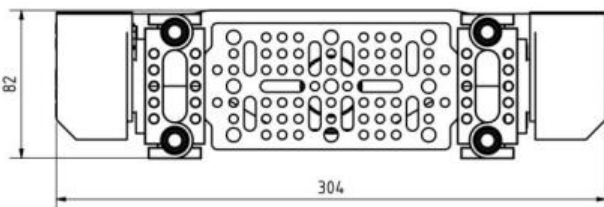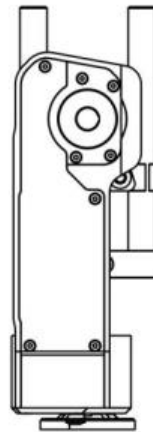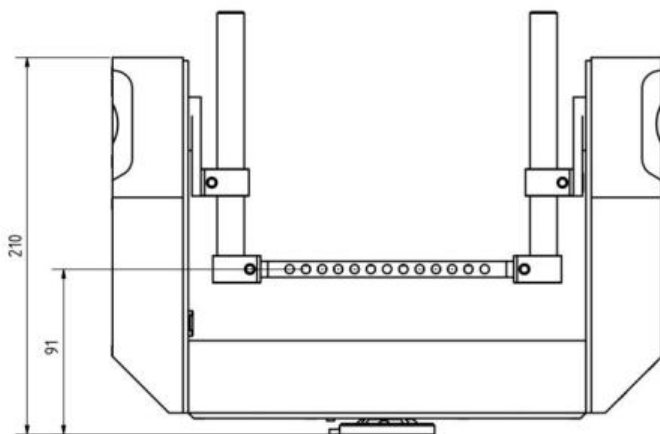

Werkstückkanten nach DIN ISO 13715	Allgemeintoleranz DIN ISO 2768	Oberflächen nach DIN ISO 1302	Maßstab: 1:2	Gewicht: "
			Werkstoff: Halbzeug:	
			MiniHead	
			Blackcam 4D MnH	
			1	
			A3	

Technical Drawing Blackcam™ B20 System

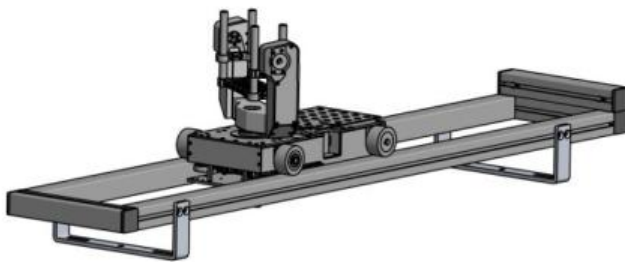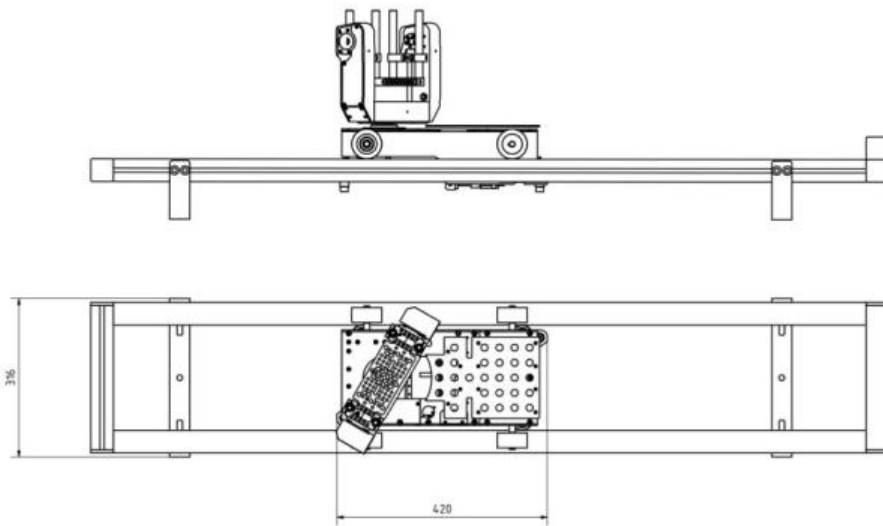

	Werkstücknorm nach DIN ISO 13715	Oberflächenrau- heit nach DIN ISO 2198	Oberfläche nach DIN ISO 13715	Maßstab: 1:5 Werkstoff: Holzboag	Gewicht:
	Name: Datum: Blatt:	Name: Datum: Blatt:	Name: Datum: Blatt:	B20-S + MiniHead	1 Bl.
Blackcam 4D		B20-S_MnH		1 Bl.	
Zeichner:	Ableser:	Gezeichnet:	Geprüft:		